

SH3.0/3.6/4.0/5.0/6.0RS

Residential Hybrid Single Phase Inverter

NEW



FLEXIBLE APPLICATION

- 80~460 V wide battery voltage range
- Ideal for both retrofitting and new installations
- Built-in smart PID recovery function



ENERGY INDEPENDENCE

- Seamless transition to backup mode, for protection against power outages
- Fast Charging or discharging, enabling higher self-consumption results
- Built-in EMS with advanced customization



USER FRIENDLY SETUP


- Plug and play installation *
- iSolarCloud monitoring available on App and Web
- Lightweight and compact, optimized for heat-dissipation




SMART MANAGEMENT

- Real time data (10 seconds refresh sample)
- 24/7 live monitoring both online and with integrated display
- Online IV curve scan and diagnosis

CIRCUIT DIAGRAM

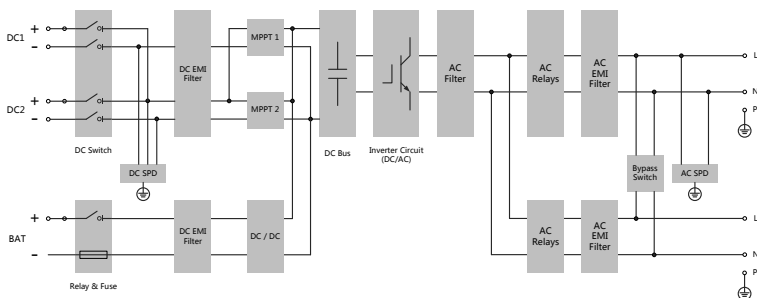

EFFICIENCY CURVE

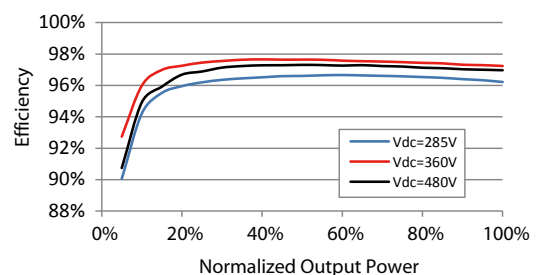

Type designation	SH3.0RS	SH3.6RS	SH4.0RS	SH5.0RS	SH6.0RS
Input (DC)					
Recommended max. PV input power	10000 Wp	10700 Wp	11000 Wp	12000 Wp	13000 Wp
Max. PV input voltage	600 V				
Min. operating PV voltage / Start-up input voltage	40 V / 50 V				
Rated PV input voltage	360 V				
MPP voltage range	40V – 560 V				
No. of independent MPP inputs	2				
Default No. of PV strings per MPPT	1				
Max. PV input current	32 A (16 A/16 A)				
Max. DC short-circuit current	40 A (20 A/20 A)				
Input / Output (AC)					
Max. AC input power from grid	10000 VA	10700 VA	11000 VA	12000 VA	13000 VA
Rated AC output power	3000 W	3680 W	4000 W	5000 W**	6000 W
Max. AC output power	3000 VA	3680 VA	4000 VA	5000 VA**	6000 VA
Rated AC output apparent power	3000 VA	3680 VA	4000 VA	5000 VA**	6000 VA
Rated AC output current (at 230 V)	13.1 A	16 A	17.4 A	21.8 A***	26.1 A
Max. AC output current	13.7 A	16 A	18.2 A	22.8 A***	27.3 A
Rated AC voltage	220 / 230 / 240 V				
AC voltage range	154 V – 276 V				
Rated grid frequency /	50 Hz / 45 – 55 Hz				
Grid frequency range	60 Hz / 55 – 65 Hz				
Harmonic (THD)	<3 % (of rated power)				
Power factor at rated power /	>0.99 at default value at rated power				
Adjustable power factor	(adj. 0.8 overexcited/leading to 0.8 underexcited/lagging)				
Feed-in phases / connection phases	1 / 1				
Efficiency					
Max. efficiency / European efficiency	97.4 % / 97.0 %	97.5 % / 97.1 %	97.6 % / 97.2 %	97.7 % / 97.3 %	97.7 % / 97.3 %
Protection & Function					
Grid monitoring	Yes				
DC reverse polarity protection	Yes				
AC short circuit protection	Yes				
Leakage current protection	Yes				
Surge Protection	DC Type II / AC Type II				
DC switch(solar)	Yes				
DC fuse(battery)	Yes				
PID recovery function	Yes				
Battery input reverse polarity protection	Yes				
Battery Data					
Battery type	Li-ion battery				
Battery voltage	80 V – 460 V				
Max charge / discharge current	30 A / 30 A				
Max charge / discharge power	6600 W				
General Data					
Dimensions (W * H * D)	490 * 340 * 170 mm				
Weight	18.5 kg				
Mounting method	Wall-mounting bracket				
Topology (Solar / Battery)	Transformerless / Transformerless				
Degree of protection	IP65				
Operating ambient temperature range	-25 °C to 60 °C				
Allowable relative humidity range	0 % – 100 %				
Cooling method	Natural convection				
Max. operating altitude	4000 m				
Display	LED digital display & LED indicator				
Communication	RS485 / Ethernet / WLAN / CAN				
DI / DO	DI * 4 / DO * 1 / DRM				
DC connection type	MC4 (PV) / Sunclix (Battery)				
AC connection type	Plug and Play ****				
Grid compliance	IEC/EN 62109-1, IEC/EN 62109-2, IEC/EN 61000-3-11, IEC/EN 61000-3-12, EN 62477-1, AS/NZS 4777.2:2020, EN 50549-1, CEI 0-21, G98 / G99				
Country of manufacture	China				
Backup Data (on grid mode)					
Rated output power for backup load	6000 W				
Rated output current for backup load	27.3 A				
Backup Data (off-grid mode)					
Rated voltage	220 V / 230 V / 240 V (±2 %)				
Frequency range	50 Hz / 60 Hz (±0.2 %)				
Total output THDv for linear load	< 2 %				
Switch time to emergency mode	< 10 ms				
Rated output power	3000 W / 3000 VA	3680 W / 3680 VA	4000 W / 4000 VA	5000 W / 5000 VA	6000 W / 6000 VA
Peak output power	8400 VA, 10s				

* Country code needs to be set before grid connection

** AS4777.2 4999W,4999VA

*** AS 4777.2:Rated and Max. AC current is 21.7A

**** AC Connector brand is Phoenix Contact and compatible brand

